

Goods Lift

Goods Lift
PLM/1000/4170/B/G

Goods Lift Description

This goods lift is a double pillar machine with a Safe Working Load of 1000 Kgs and a lift height of 4170mm. The lifting platform will be big enough to allow a standard pallet (1200 x 1000mm) to be loaded using a hand pallet truck. At the upper level, there will be a landing plate to allow easy unloading. The goods lift is constructed from Grade 304 stainless steel and would be bolted to the floor. Lifting with this goods lift is accomplished via chains driven by a motor gearbox mounted at the top of the one column with a crossover shaft to the other column.



Double Pillar Goods Lift for Standard Pallets

Call now on **01495 312 172**

webenquiry@basehandling.co.uk

Base Handling Products Limited, Unit 20, Barleyfield Industrial Estate
Brynmawr, Gwent, NP23 4YF.



Safety Guard to PD 5304:2005 Safety of Machinery



The safety guard is constructed from 40 x 40 x 3mm stainless steel box section and 3mm wire, 40mm aperture stainless steel weld mesh meet the requirements of PD 5304:2005 Safety of Machinery. It would enclose the goods lift to a height of 4730mm with a hinged door at each level through which the pallets can be loaded and unloaded. Each door is electrically interlocked to prevent the goods lift being operated with a door open and in addition, the doors are mechanically locked closed whilst the goods lift is running. Each door may only be opened when the lifting carriage is at the appropriate level.

Goods Lift Specification

DESCRIPTION	DOUBLE PILLAR GOODS LIFT
MODEL No.	PLM/1000/4170/B/G
CAPACITY	1000Kgs
LIFT HEIGHT	4170mm
OVERALL HEIGHT	6270mm
MACHINE HANDING	LEFT OR RIGHT HAND AVAILABLE
PLATFORM SIZE	1400 x 1200mm
CONTAINER DESCRIPTION	STANDARD PALLET 1200 x 1000mm
BASE ARRANGEMENT	BOLTED TO THE FLOOR
CONTROL CIRCUIT	24Vac (STANDARD)
ELECTRICAL RATING	IP65
LIMIT SWITCHES	ADJUSTABLE ROD
MOTOR DETAIL	2.2kW, 3 PHASE, 50 CYCLE, 415V
MOTOR BRAKE	415V SEPARATELY EXCITED
GEARBOX DETAIL	FLENDER
LIFT CHAIN	1" SIMPLEX SEDIS DELTA 'Z'
TENSION CHAIN	3/4" SIMPLEX SEDIS DELTA 'Z'
LIFT SPEED	6.4 METERS/MINUTE

Goods Lift Application Story

This goods lift was required to elevate a standard pallet (1200 x 1000mm) from a ground floor level onto a mezzanine floor at a height of 4170mm. This particular goods lift had a 'Z' loading configuration so that the pallet was loaded at the front and unloaded at the back of the machine at the upper level. This goods lift can be mounted on an existing floor and therefore does not require a pit to be created with the requisite drainage issues.

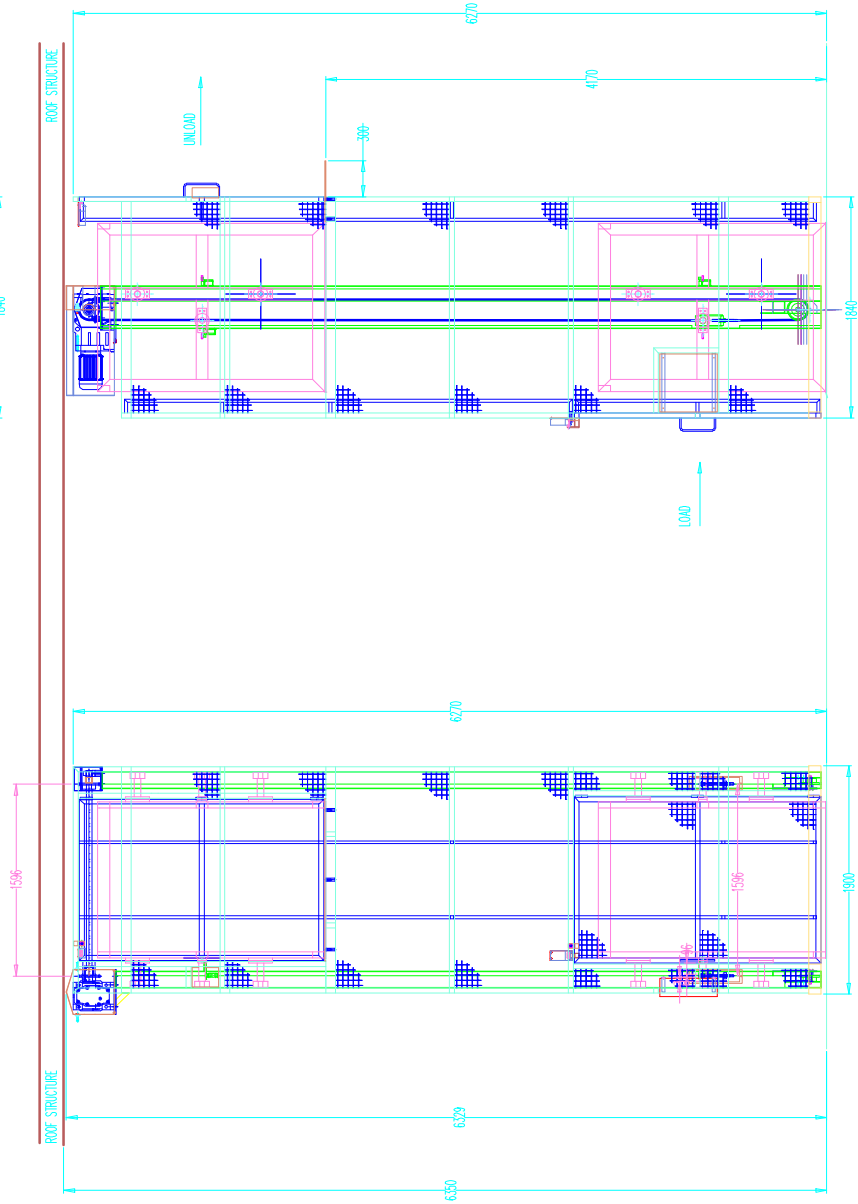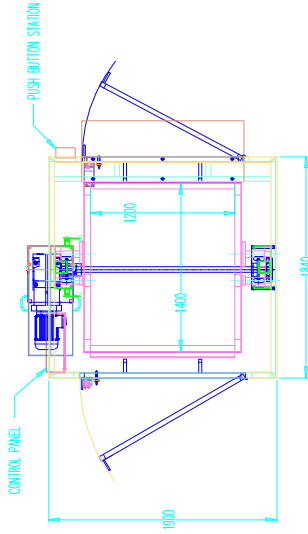

REMOVE ALL BURRS AND SHARP EDGES TOLERANCES : UNLESS OTHERWISE STATED FABRICATIONS : +/- 2.0mm MACHINING : +/- 0.2mm SHEET METAL WORK : +/- 1.0mm AND +/- 1.0 DEG	
DRAWN JPW	CHECKED DATE 21-07-05
DRAWING NUMBER BP 3006-1	

BASE HANDLING PRODUCTS LIMITED
 UNIT 20 BARLEFIELD INDUSTRIAL ESTATE,
 BRYNMAWR,
 GWENT, NP23 4TF
 TEL: (01495) 312172 FAX: (01495) 312089 EMAIL: info@baseproducts.co.uk

REVISION NUMBER	CUSTOMER
	DOUBLE PILLAR PALLET LIFT BOLTED GUARDED

COPYRIGHT RESERVED
 DRAWN THIRD ANGLE PROJECTION