

Guarded Tray Tipper

Single Pillar Guarded Tray Tipper

CTM/40/4000/B/G

Single Pillar Guarded Tray Tipper Description

This single pillar guarded tray tipper was designed to lift and tip a pair of crates (600 x 400 x 170mm High) at a height of 4000mm. The guarded tray tipper is constructed from Grade 304 stainless steel and is fully TIG welded throughout. The lifting is achieved by a food quality toothed timing belt driven by a motor gearbox mounted at the bottom of the main column. The guarded tray tipper is designed to be bolted to the floor. The crates are hand loaded through an aperture in the guarded tray tipper guard fitted with a Safety Light Barrier. When the lifting cycle is started, the light guard is energised until the machine lifts and tips through its cycle and returns to the load position. At the lift frame full down position, a pneumatic cylinder ejects the empty crates automatically.



Single Pillar Guarded Tray Tipper Bolted

Call now on 01495 312 172

webenquiry@basehandling.co.uk

Base Handling Products Limited, Unit 20, Barleyfield Industrial Estate
Brynmawr, Gwent, NP23 4YF.



Safety Guard to PD 5304:2005 Safety of Machinery


The safety guard is constructed from 40 x 40 x 3mm stainless steel box section and 3mm wire, 25mm aperture stainless steel weld mesh to meet the requirements of PD 5304:2005 Safety of Machinery. It would enclose the guarded tray tipper to a height of 2200mm on three sides with a hinged door on the fourth side. The guard door is electrically and mechanically interlocked preventing the guarded tray tipper from operating with the door open. In addition, the guard door can only be opened when the lifting carriage is at the full down position. The guarded tray tipper control system has provision for a 'Call for Product' signal to be connected.

Guarded Tray Tipper Specification

DESCRIPTION	SINGLE PILLAR HIGH SPEED TIPPER
MODEL No.	BTM/100/4560/B/G
CAPACITY	100Kgs
TIPPING HEIGHT	4560mm
TIPPING ANGLE	130 DEGREES
OVERALL HEIGHT	5540mm
MACHINE HANDING	LEFT OR RIGHT HAND AVAILABLE
TIPPING CHUTE	OPTIONAL
CONTAINER DESCRIPTION	INTEGRAL SKIP
BASE ARRANGEMENT	BOLTED TO THE FLOOR & BRACED
CONTROL CIRCUIT	24Vac (STANDARD)
ELECTRICAL RATING	IP65
LIMIT SWITCHES	ADJUSTABLE ROD or SPRING
MOTOR DETAIL	2.2kW, 415V, 3 PHASE, 50 CYCLE
MOTOR BRAKE	415V SEPARATELY EXCITED
GEARBOX DETAIL	FLENDER
OUTPUT R.P.M.	28 R.P.M.
LOAD/TENSION CHAIN	50mm TOOTHED TIMING BELT
TENSILE STRENGTH	27000N
LIFT SPEED	VARIABLE VIA INVERTER DRIVE

Guarded Tray Tipper Application Story

This guarded tray tipper was designed for a salad processor to lift and tip a pair of salad trays at a time and discharge into a vibratory feed conveyor feeding a multi head weighing system. Two trays were loaded through an aperture in the safety guard which was fitted with a safety light barrier. Once the trays were loaded, they were then lifted and tipped and ejected automatically at the full down position by the operation of a pneumatic cylinder. The infeed and base of the lift frame were fitted with stainless steel gravity rollers to allow easy loading and discharge of the trays.

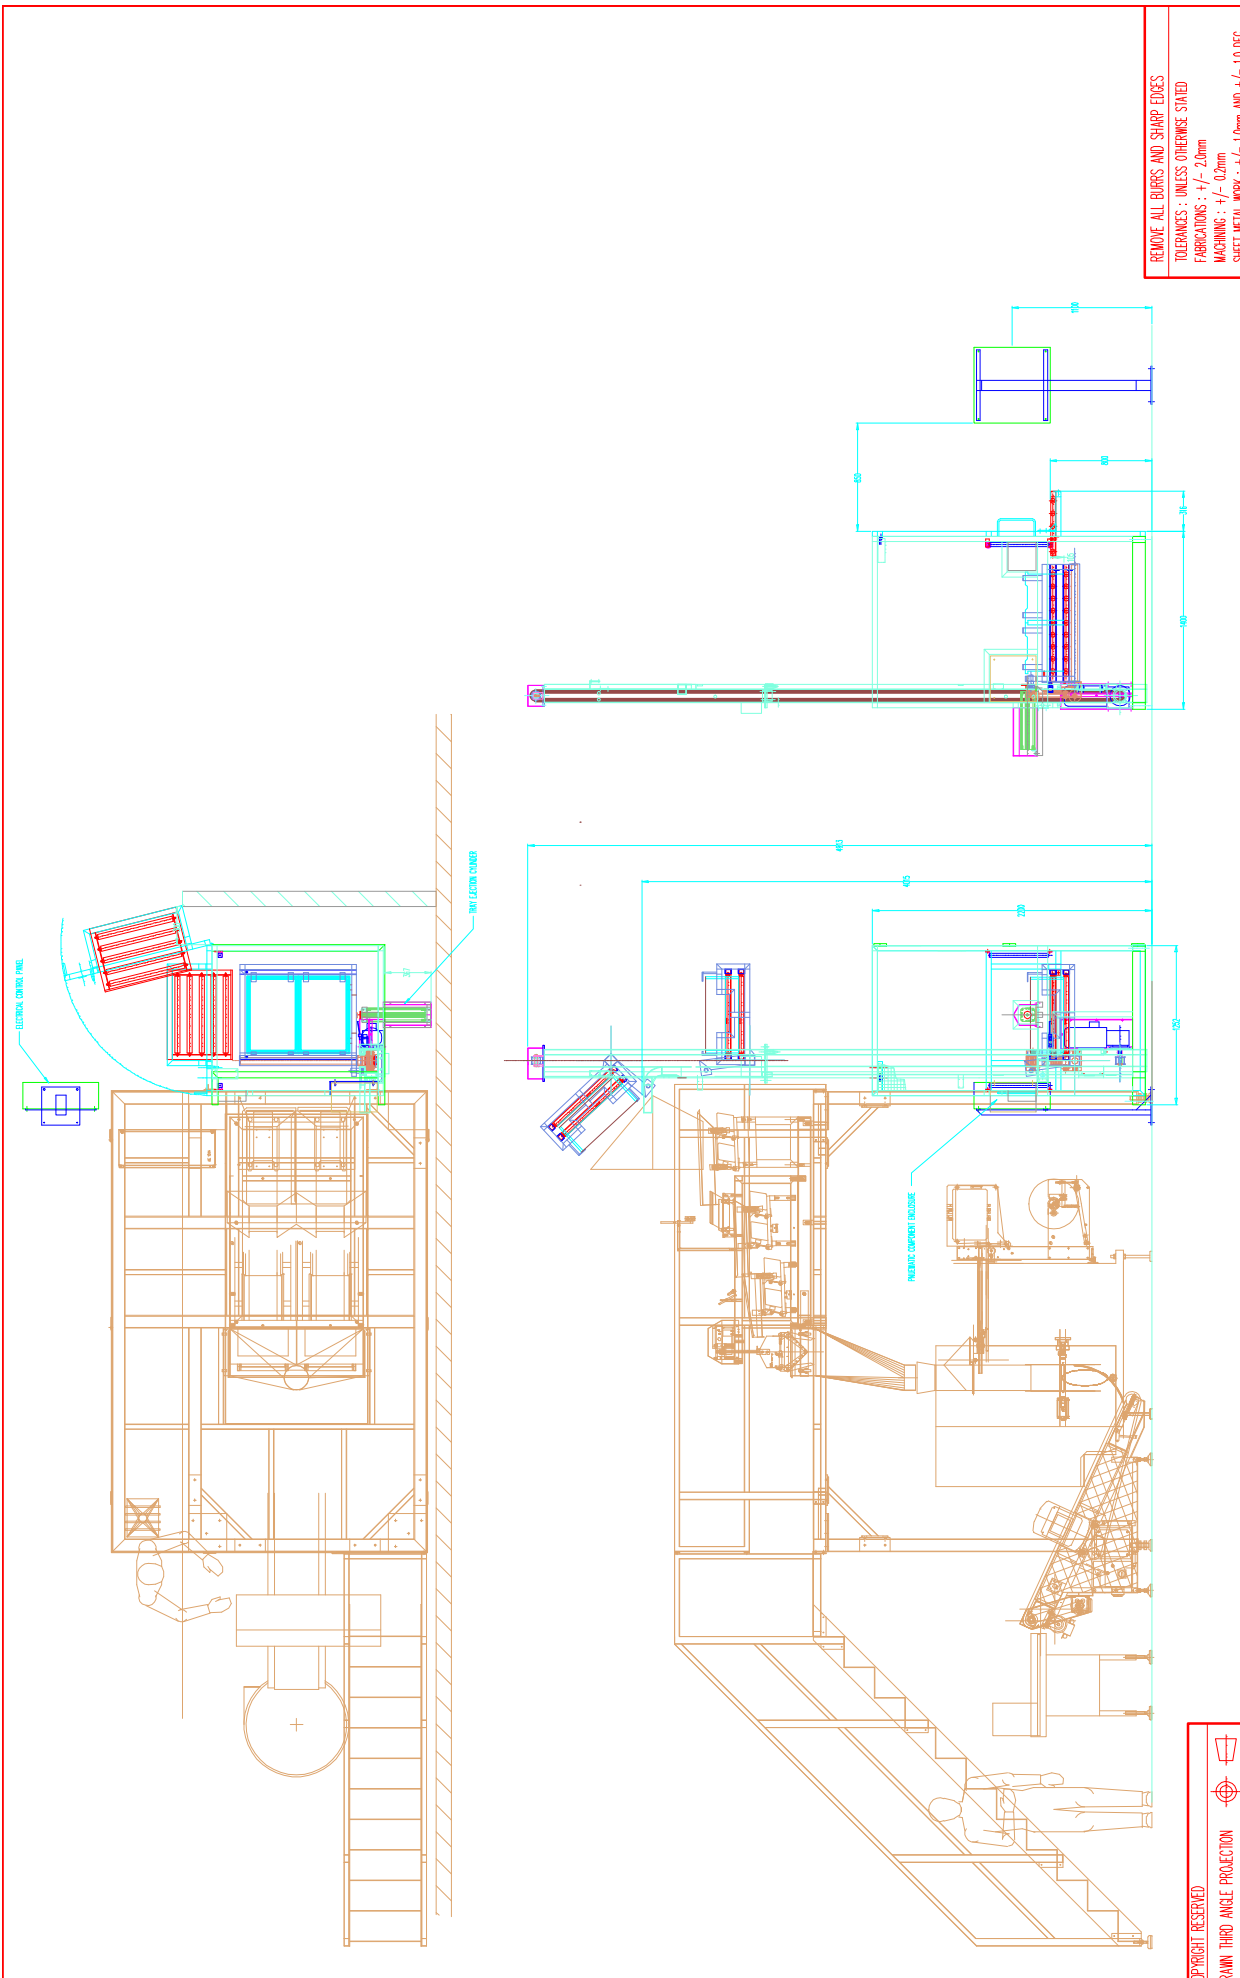

REMOVE ALL BURRS AND SHARP EDGES	
TOLERANCES : UNLESS OTHERWISE STATED	
FABRICATIONS : +/- 2.0mm	
MACHINING : +/- 0.2mm	
SHEET METAL WORK : +/- 1.0mm AND +/- 1.0 DEG	
DRAWN	CHECKED
JPW	DATE
	72-01-04
DRAWING NUMBER	
BP2572-1	

REVISION NUMBER		DRAWING TITLE	
CUSTOMER		SINGLE PILLAR HIGH SPEED CRATE TIPPER BOLTED GUARDED	
<p>BASE HANDLING PRODUCTS LIMITED UNIT 20 BARLEFIELD INDUSTRIAL ESTATE, BRYNMAWR, Gwent, NP23 4TF TEL: (01495) 312172 FAX: (01495) 312089 EMAIL: info@baseproducts.co.uk</p>			

COPYRIGHT RESERVED
 DRAWN THIRD ANGLE PROJECTION